

SIGHT CHECKER SCK

DESCRIPTION

The SCK sight checkers function as both sight glasses and check valves.

Installed after the steam trap, the sight checker is a device whose main purpose is to visually check the condition and potential leakages of steam traps.

Connections are female screwed.

USE: Condensate pipes, downstream of steam traps.

AVAILABLE MODELS: SCK.

SIZES: 1/2", 3/4" and 1".

CONNECTIONS: Female screwed ISO 7/1 Rp (BS21).

INSTALLATION: Horizontal or vertical (bottom to top) installation.


See IMI – Installation and maintenance instructions.

SCK should be fitted at least 1 meter from the trap in order to protect the glass from thermal pressure or shock.

PMO – Max. operating pressure 10 bar

TMO – Max. operating temperature 150 °C

How to order: i.e. SCK 1/2" BSP.

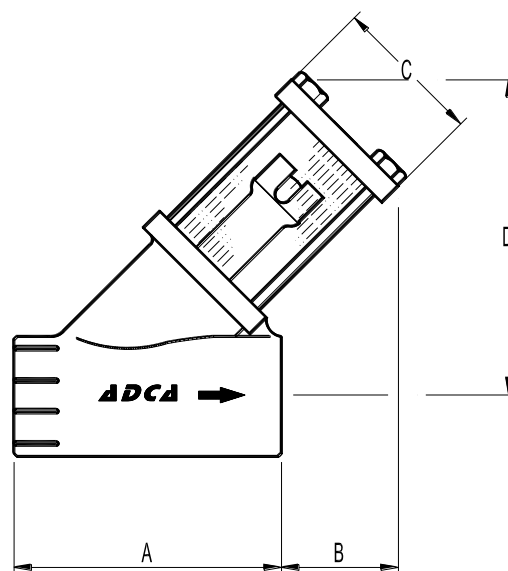

DIMENSIONS (mm)					
SIZE	A	B	C	D	WGT. (kg)
1/2"	80	36	45	95	0,9
3/4"	80	36	45	95	0,9
1"	90	40	56	110	1,3

MATERIALS		
POS. Nº	DESIGNATION	MATERIAL
1	Body	Bronze B62 / ASTM B148-97
2	Cover	Brass EN12165 / CuZn39Pb2
3	* Sight tube	Tempered borosilicate glass
4	Discharge tube	Copper
5	Check ball	Stainless steel
6	Bolts	Steel 8.8
7	* Gasket	Graphite

* Available spare parts.

