

## STEAM INJECTORS SI115

### DESCRIPTION

The SI series steam injectors from ADCA are condensate injectors. They ensure low noise and vibration and rapid heating of still or flowing fluids in basins and vessels, due to direct steam injection.

Steam enters through the inlet housing, passes along the centre of the heater, mixing with the cool water, which is drawn in through radial holes.

### MAIN FEATURES

Quiet operation.  
Corrosion-resistant.  
No moving parts.

**OPTIONS:** Complete system including vacuum breaker and self operated controller. Different capacities and design available under request.

**USE:** Direct steam injection heating systems. See IMI – Installation and maintenance instructions.

**AVAILABLE MODELS:** SI115.

**SIZES:** 1/2".

**CONNECTIONS:** Female screwed ISO 7/1 Rp (BS21).

**INSTALLATION:** Horizontal installation.


**LIMITING CONDITIONS:**  
Body design conditions: PN 25  
Max. operating pressure: 17 bar  
Max. recommended water temp.: 95 °C

**MATERIALS:** Austenitic stainless steel  
AISI 316 / 1.4401.

How to order: i.e. SI115 DN 1/2" BSP.



**CAPACITY CHART**  
(With the vessel at atmospheric pressure)

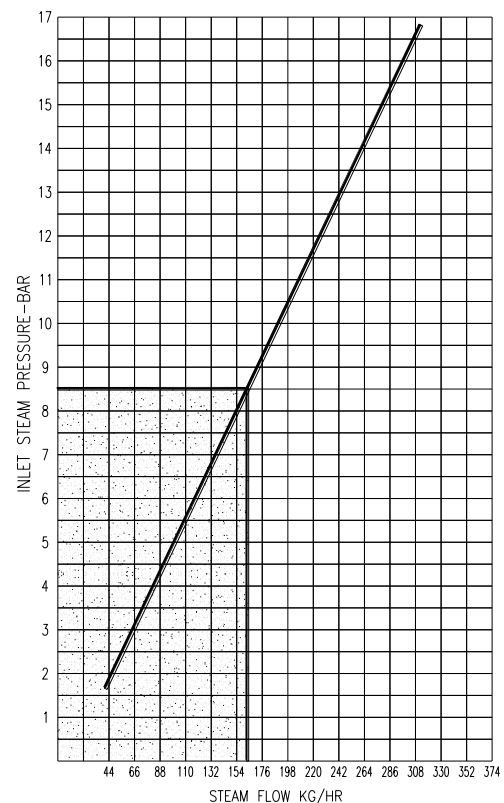

Selection under shadow area is recommended for the most quiet operation.

Example: We require the injection of 230 kg/h of steam with a pressure of 5,5 bar. From the injector capacity chart, we see that, at 5,5 bar the injector will process 110 kg/h and 230 divided by 110 = 2,09.

Two injectors will barely cope, so it is recommended to install three injectors, which will meet the demand.

